


OCULUS

UB 4

höhenverstellbar

Bilaterally Height Adjustable
Universal Trial Frame
With Vernier Scale

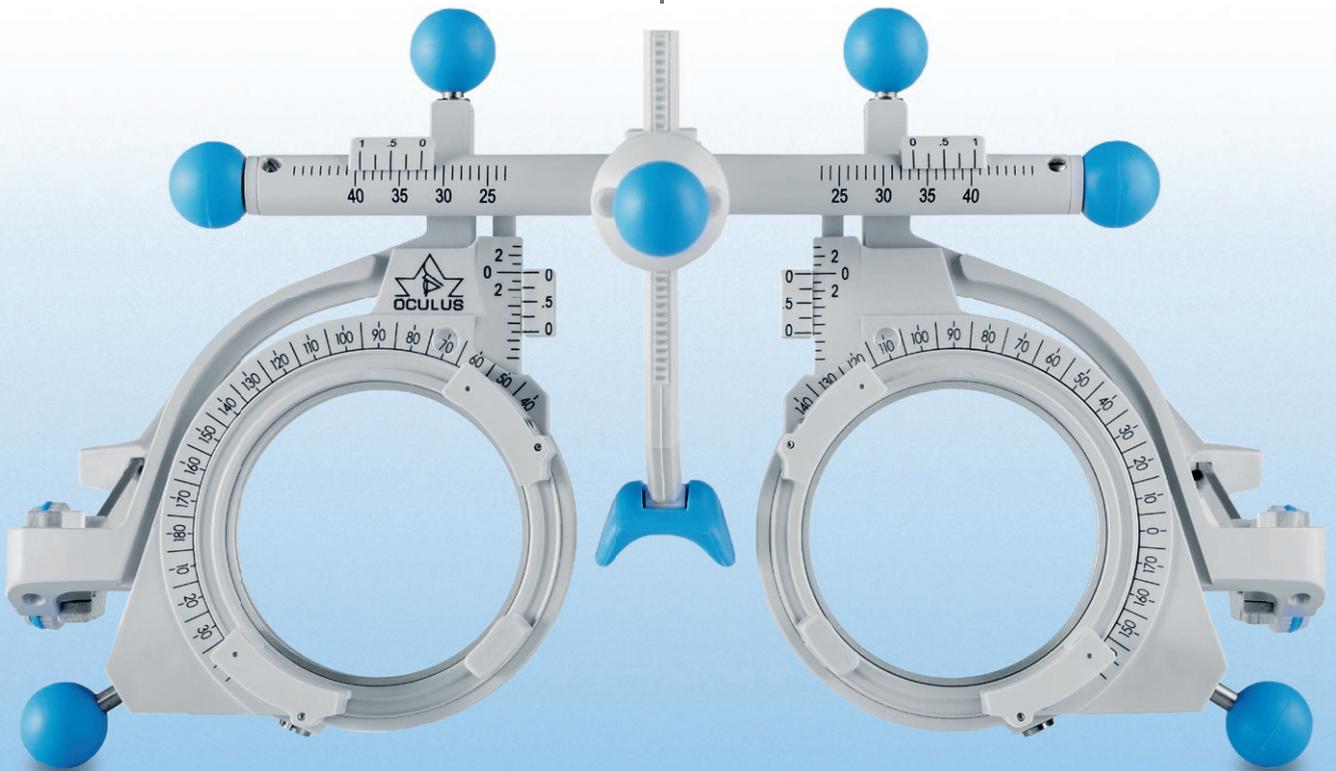

 OCULUS®


We focus on progress

Universal Trial Frame

UB 4 höhenverstellbar*

The universal trial frame with a vernier scale for more precision

Universal trial frames by OCULUS are familiar to anyone involved in prescribing lenses for eyeglasses. In addition to ergonomically optimized user elements, skin-friendly materials and light weight, all of which are standard features among OCULUS trial frames, the UB 4 höhenverstellbar has something more to offer: even finer precision. Its single height-adjustable glassholders allow each side to be adjusted individually, i.e. independently of the other eye, and not only horizontally but also vertically. This is complemented by a vernier scale, permitting measurements to a precision of a quarter millimetre.

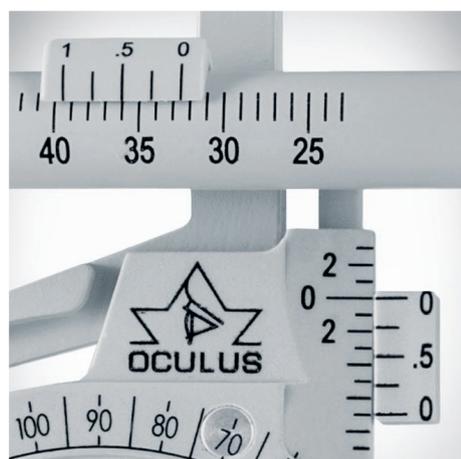


Settings with vernier scale accurate to 0.25 mm (0.01 in)

Exact centering by horizontal and vertical adjustment of the lens holder

Parallax-free reading of the set corneal vertex distance (CVD)

Selection of three different anatomically shaped nose pieces

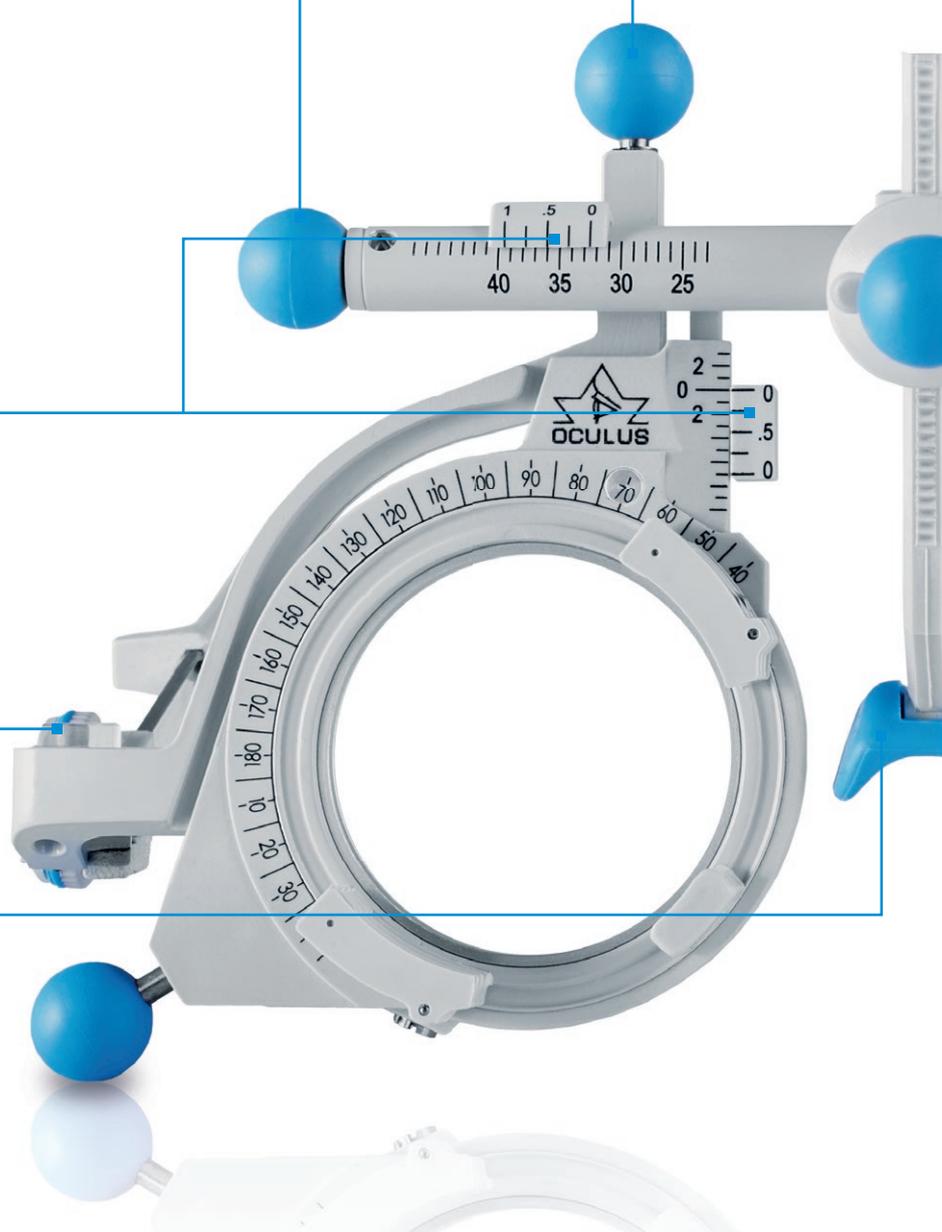


*höhenverstellbar ['hø:ənʃtəg'fɛlba:r] = height-adjustable

Fashioned by hand – scrutinized by high-tech Coordinate Measuring Machines

The new UB 4 höhenverstellbar tops the line-up of OCULUS universal trial frames. This high-end, high-precision instrument made of 226 individual parts consisting of dedicated advanced materials is carefully crafted by hand with the highest attention to detail. Every single UB 4 höhenverstellbar trial frame is subjected to extensive quality control after assembly, to ensure that it meets the highest demands.



Height- and depth-adjustable nose bridge

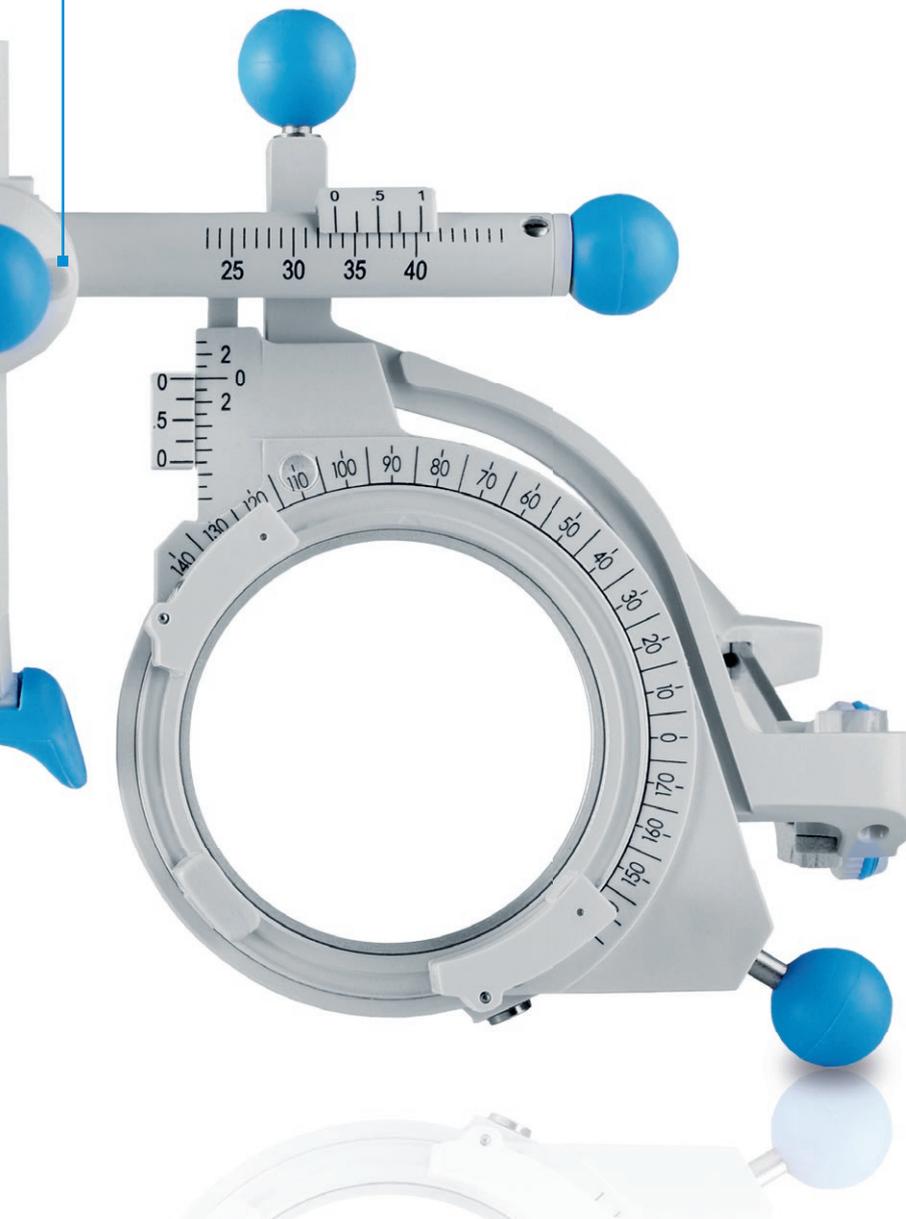

Always the right trial lens available

OCULUS offers a variety of lens cases ranging from the standard model to large cases including numerous special trial lenses.

All OCULUS trial lenses with a rim diameter of 38 mm (lens diameter 21 mm) are compatible with the UB 4 höhenverstellbar.




The UB 4 höhenverstellbar comes with an attractive wooden box. Polarization filters (analyzers) for lateral mount are optionally available.

Technical Data

OCULUS Universal Trial Frame UB 4 höhenverstellbar

Technical specifications	
PD adjustment range	48 - 80 mm (1.9 - 3.2 in)
Scale division	1 mm (0.04 in)
Reading accuracy with vernier scale	0.25 mm (0.01 in)
Weight	72 g (2.6 oz)
Arm length	88 - 124 mm (3.5 - 4.9 in)
Tilt of arm (up/down)	14.5° / 8°
Space for lenses, front	3
Space for lenses, behind	2
Lens diameter	38 mm (1.5 in)
Rotary area (in front)	360°
Height adjustment	± 4 mm (0.16 in)

CE in accordance with Medical Device Directive 93/42/EEC

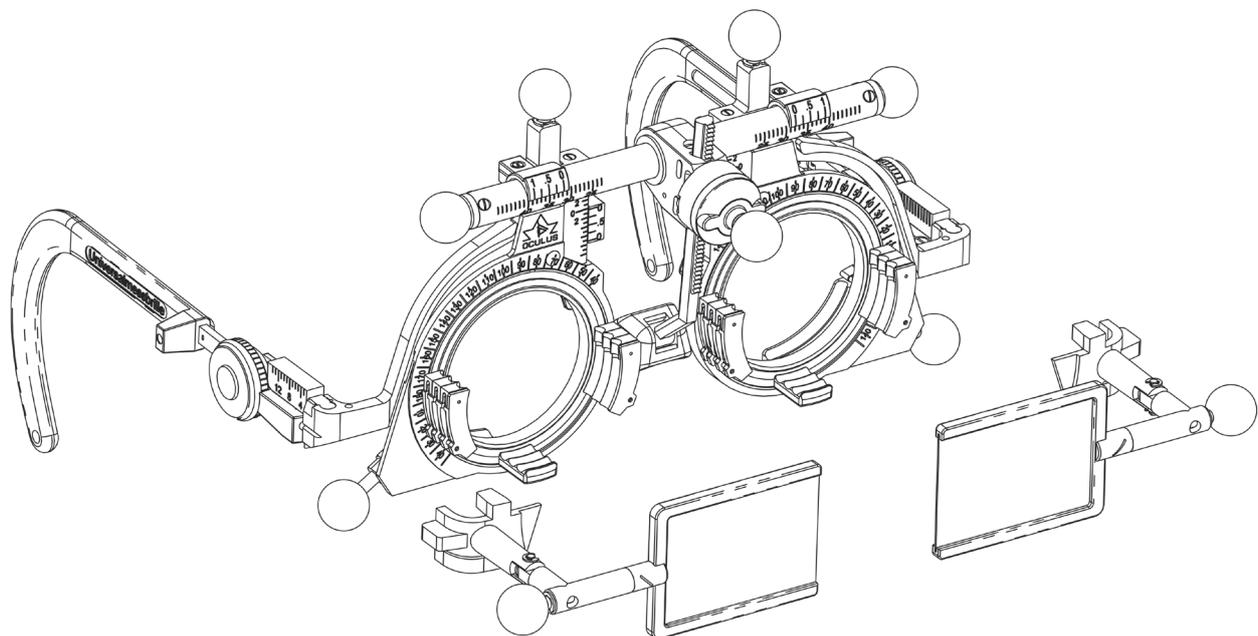

WWW.OCULUS.DE

OCULUS Optikgeräte GmbH
Postfach • 35549 Wetzlar • GERMANY
Tel. +49-641-2005-0 • Fax +49-641-2005-295
Email: export@oculus.de • www.oculus.de

- OCULUS USA, sales@oculususa.com
- OCULUS Asia, info@oculus.hk
- OCULUS Czechia, oculus@oculus.cz
- OCULUS Iberia, info@oculus.es
- OCULUS Poland, biuro@oculus.pl



OCULUS is certified by TÜV according to
DIN EN ISO 13485

